

SÜDA Compact Class

High-Performance wet technique plus three-way nozzle in SLIM LINE Design



Choose from 4 different wet technique handpieces / micromotors:



Top-quality and low maintenance:
The specially coated glass cover

Magnifying lamp holder
integrated on both sides

Individually configurable spray
handpiece + three-way nozzle
in extending handpiece holder



Top drawer with folding front
as additional shelf space

Optionally with all-over
UV-compartment

High lower draw

Easy access via side wing flap

Large, smooth running wheels

Item No.	Accessories
1245.006	Air motor oil, 250 ml

unoSPRAY

The entire spectrum of the SÜDA Compact Class in the elegant SLIM LINE Design has been expanded to include a powerful wet technique version with the new treatment unit, unoSPRAY.

The manifold treatment unit offers a high level of individual adaptability: So not only can you adjust the configuration of the cabinet (i.e. UV compartment, EASY-OPEN etc.) according to your needs, but also the tools/micro-motors.

Available in
EASY-OPEN or with
recessed grip for
opening the drawer



Order diagram for cabinet system unoSPRAY			E	WT	F	C	U	G	F
Base model	Function cabinet Softline wet technique	Item No. 1214 -							
Installation side = E	Wet technique, right side		0						
	Wet technique, left side		1						
Wet technique = WT	Compact-Light handpiece PDL40			0					
	Pododent-Micromotor Comfort NBX / PX65			3					
	Pododent-Micromotor Starlight NBX LED / PX 65 L			4					
	Pododent-Micromotor Starlight Power NLX LED / PX 65 L			5					
Three-way nozzle = F	without three-way nozzle				0				
	with three-way nozzle				1				
Body color = C	white					0			
	light grey					1			
UV compartment = U	without UV compartment						0		
	with UV compartment						1		
Handle selection = G	recessed handle shell							0	
	Easy Open (for 3 x drawers)							1	
	mounted handel shell							2	
Foot switch = F	without foot switch								0
	with foot switch								1
Light holder Waldmann	Item No. with additional L; eg xxxx-0000000L								L



SÜDA Compact Class

The Combination of suction, wet technique and three-way nozzle



Combine according to your demand.

Optionally LEFT or RIGHT
WET TECHNIQUE - Spray tool/micro-motor available in different variants and optional three-way nozzle

Optionally RIGHT or LEFT
SUCTION TECHNIQUE - Powerful system, choice of up to 25,000 rotations per minute for all coarse filing or up to 40,000 rotations per minute for all fine applications/fissure work




Item No.	Accessories for ordering
1995.6	Add-on kit for radio foot switch
8415.2	Micro-dust bags, 1 pack each with 5 pieces
1995.003	collet chuck
1245.006	Air motor oil, 250 ml
1245.006	Compressor oil, 500 ml

spray vac

All-In-One Solution: SÜDA spray vac

The new combination unit in SLIM LINE Design offers you everything you need for a broad and professional application spectrum. You use the automated system variants - suction and wet technique – as well as the optional three-way nozzle. You will also find plenty of storage space in the elegant treatment unit, including an optional UV compartment.

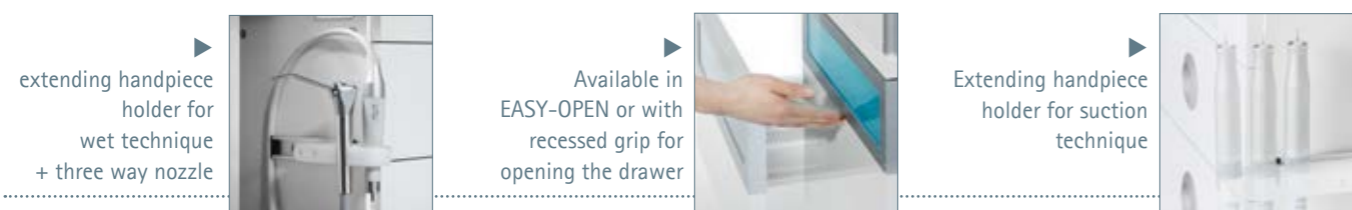

Order diagram for cabinet system SÜDA spray vac		Item No. 1215 -	E	DT	WT	N	C	U	G	F
Installation side = E	Dry technique left, Wet technique right		0							
	Dry technique right, Wet technique left		1							
Dry technique = DT	System VAC 25			0						
	System VAC 40			1						
Wet technique = WT	Compact-Light handpiece PDL40				0					
	Pododent-Micromotor Comfort NBX / PX65				3					
	Pododent-Micromotor Starlight NBX LED / PX 65 L				4					
	Pododent-Micromotor Starlight Power NLX LED / PX 65 L				5					
Three-way nozzle = N	without three-way nozzle					0				
	with three-way nozzle					1				
Body color = C	white						0			
	light grey						1			
UV compartment = U	without UV compartment							0		
	with UV compartment							1		
Handle selection = G	recessed handle shell								0	
	Easy Open (for 3 x drawers)								1	
Foot switch = F	without foot switch									0
	with foot switch									1
Light holder Waldmann	Item No. with additional L; eg 1215-0000000L									

Compressed air innovation

A new dimension in price and performance



podoAIRspeed

The new compressed air operated treatment unit podoAIRspeed opens up new dimensions in compressed air treatment technology when it comes to technical components, working ergonomics and efficiency as well as functionality and design.

With its extremely favourable cost/benefit ratio, it offers a real alternative to micromotor-operated suction or wet technology systems even for small foot care practices.



Elegant. Ergonomic. Functional.



Hygienic and sturdy glass plate with special coating

Magnifying lamp holder integrated on both sides

Portable handpiece holder

The flap can be used as an additional storage tray or technical module for individual fine-tuning (see detailed picture on the next page)

Drawers with handle shell or in EASY-OPEN version

Optional UV-compartment


Large smooth running casters

Turbine handpiece

NT-handpiece/air motor

three-way-nozzle

Side flap to store the foot switch

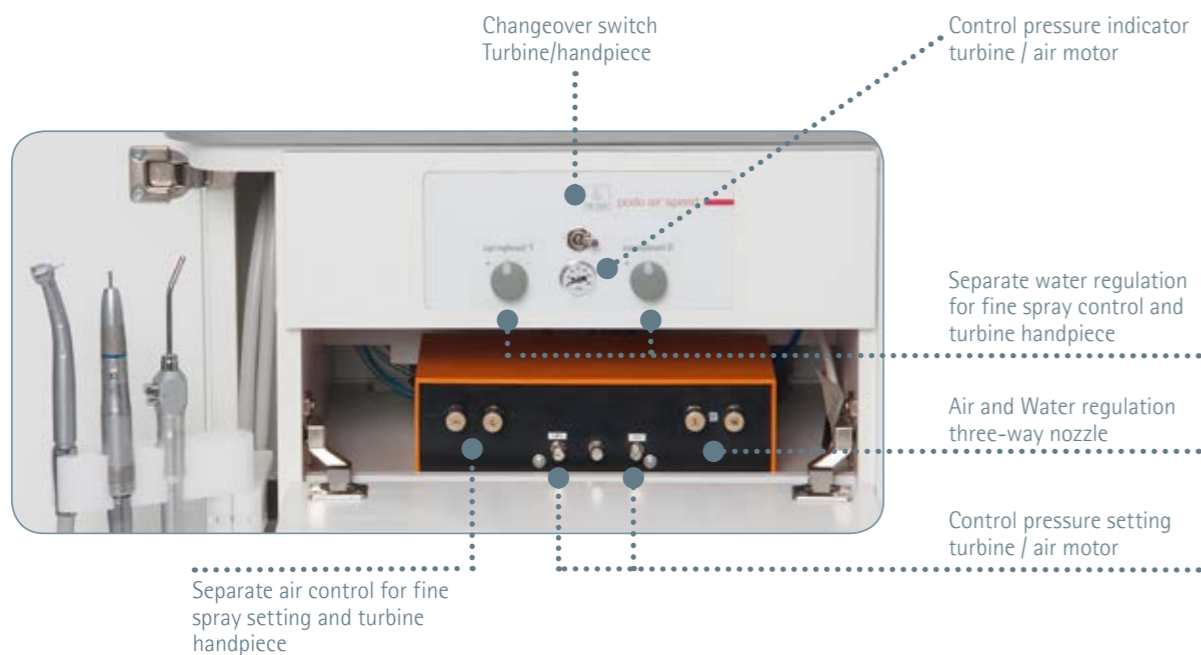
podoAIRspeed

- Compressed air operated treatment technology
- Compressed air controlled, infinite revolution regulation
- Fine spray regulation

Equipment features:

- Compact functional cabinet, easily moved
- Instrument tray, shelves, storage space
- Pressure display
- Noise insulated compressor cabinet – space-saving
- Magnifying lens holder
- „plug & play“ function of all modules
- Service-friendly

Technical data:

Dimensions W/D/H (cm): 54,5 / 41 / 86
 Weight: Approximately 46 kg

Delivery includes:

Treatment unit,
 Air motor handpiece (air motor + handpiece),
 Triple spray turbine handpiece,
 three-way nozzle,

Order scheme for cabinet system podoAIRspeed		I	H	M	S	C	U	H	L
Base model	Item No. 1256-	X	X	X	X	X	X	X	x
Installation side = I	Handpieces, left side	0							
	Handpieces, right side	1							
Handpiece selection = H	Turbine handpiece Triple Spray	0							
	Turbine handpiece LED	1							
	Turbine handpiece NSK	2							
Air motor = M	SÜDA AM-WS M4			0					
	SÜDA HS-WS M4				0				
Support handpiece = S	NSK PX65				1				
	white (matt paint)					0			
Body color = C	light grey (matt paint)					1			
	without UV compartment						0		
UV compartment = U	with UV compartment						1		
	Recessed handle shell							0	
Handle selection = H	Easy Open (for 3x drawers)							1	
	Lamp holder Standard								0
Lamp holder = L	Lamp holder Waldmann								1



Item No.	Accessories
1389.9	STERIA spray, spray service for air motor handpieces and turbines, 500 ml
1389.2	NOZZLE Standard
1389.6	Nozzle for turbines

Compressor podoAIRspeed

Optional with suitable cabinet in the SLIM-LINE design

Technical specifications compressor 9 L:

Current: 230 V / 50 Hz
 Power input: 800 W
 Suction output: 152 l/min
 Dimensions without cabinet: 38 x 38 x 48 cm (LxWxH)
 Weight without cabinet: 21 Kg
 Dimensions with cabinet: 54,5 x 41 x 86 cm (LxWxH)
 Weight with cabinet: 56 kg

Technical specifications compressor 30 L:

Current: 230 V / 50 Hz
 Power input: 1150 W
 Suction output: 230 l/min
 Dimensions without cabinet: 43 x 41 x 63 cm (LxWxH)
 Weight without cabinet: 44 kg
 Dimensions with cabinet: 54,5 x 50 x 86 cm (LxWxH)
 Weight with cabinet: 68 kg

Item No.	Description
1253	Compressor 9 Liter with cabinet, white
1253.1	Compressor 9 Liter with cabinet, light grey
1252	Compressor 30 Liter with cabinet, white
1252.1	Compressor 30 Liter with cabinet, light grey
1253.10	Compressor 9 Liter
1252.10	Compressor 30 Liter

Item No.	Accessories
1245.006	Air motor oil, 250 ml
1245.006	Compressor oil, 500 ml



NEW individual handpiece and turbine configuration

Compressed air for the smallest offices

podoAIRmini

Equipment features of the control unit:

- Low maintenance, durable plastic-coated finish
- Working surface with stainless steel finish rail (rear and sides)
- Pull-out unit with glass front or optionally an alternative integrated UV unit in the same place
- Equipped for magnifying lamp attachment on the left
- Drawers and pull-out units with comfortable, cushioned indentures
- Easy-to-reach, laterally positioned controls.
- Technology with lateral revolving door and a mounted pressure regulator, water separator and collecting vessel with pressure indicator
- Centrally positioned additional retractable and rotating controls, which can be reached on both sides
- An open technical panel with a mounted pressure regulator, water separator and collecting vessel with pressure indicator on the centre of reverse side



Technical data:

Number of revs.: Pneumatic motor
continuously adjustable from 40.000 revs/min
High-performance turbine
continuously adjustable from 450.000 revs./min

Air required: 70 l/min

Weight:: approx. 40 kg

Dimensions (cm): W 61 x D 44 x H 78

Item No.	Accessories
1245.006	Air motors oil, 250 ml
1245.006	Compressor oil, 500 ml

Order scheme for cabinet system podoAIRmini		H	M	S	C	U	L
Base model:	Item No. 1261-	X	X	X	X	X	X
Handpiece selection = H	Turbine handpiece Triple Spray	0					
	Turbine handpiece LED	1					
	Turbine handpiece NSK	2					
Air motor = M	SÜDA AM-WS M4		0				
Support handpiece = S	SÜDA HS-WS M4			0			
	NSK PX65			1			
Body color = C	white (matt paint)				0		
	light grey (matt paint)				1		
UV compartment = U	without UV compartment					0	
	with UV compartment					1	
Lamp holder = L	Lamp holder Standard						0
	Lamp holder Waldmann						1

The compact classic

podoAIRmaxi

Equipment features of the control unit:

- Low maintenance, durable plastic-coated finish
- Working surface with stainless steel finish rail (rear and sides)
- Pull-out unit with glass front or optionally an alternative integrated UV unit in the same place
- Equipped for magnifying lamp attachment on the left
- Drawers and pull-out units with comfortable, cushioned indentures
- Centrally located, accessible on both sides and also pulling out and rotating control module
- On the back (center) open technology specialist with mounted pressure regulator, water separator and water bottle with pressure gauge

Completely integrated pneumatic unit podoSPEED module.



Technical data:

Number of revs.: Pneumatic motor
continuously adjustable from 40.000 revs/min
High-performance turbine
continuously adjustable from 450.000 revs./min

Air required: 70 l/min

Weight:: approx. 65 kg incl. cabinet

Dimensions (cm): W 95 x D 44 x H 78

Item No.	Accessories
1245.006	Air motor oil, 250 ml
1245.006	Compressor oil, 500 ml

Order scheme for cabinet system podoAIRmaxi		H	M	S	C	U	L
Base model:	Item No. 1262-	X	X	X	X	X	X
Handpiece selection = H	Turbine handpiece Triple Spray	0					
	Turbine handpiece LED	1					
	Turbine handpiece NSK	2					
Air motor = M	SÜDA AM-WS M4		0				
Support handpiece = S	SÜDA HS-WS M4			0			
	NSK PX65			1			
Body color = C	white (matt paint)				0		
	light grey (matt paint)				1		
UV compartment = U	without UV compartment					0	
	with UV compartment					1	
Lamp holder = L	Lamp holder Standard						0
	Lamp holder Waldmann						1